


Bisque 16005




Bisque L/C 16105

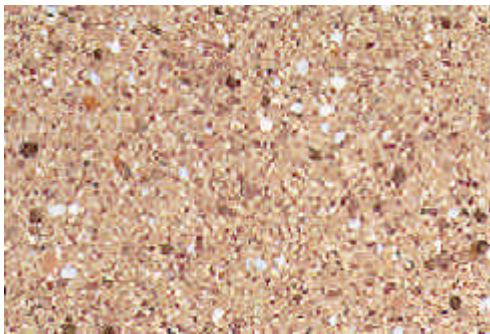

Mineralite 16017




Mineralite L/C 16117

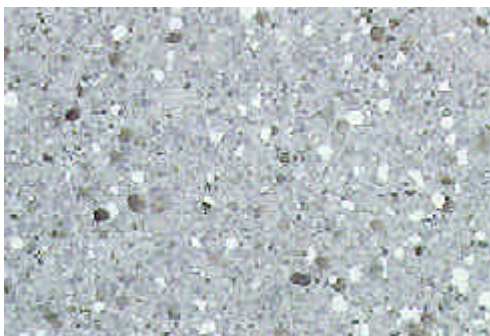

Sterling Blue 16014



Sterling Blue L/C 16114

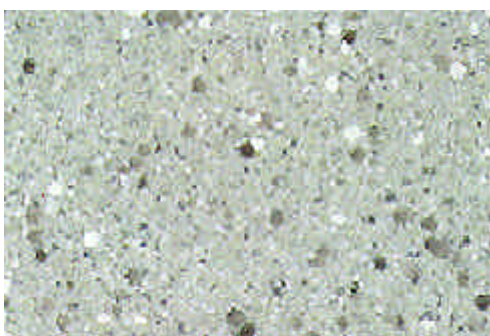

Seaspray 16013



Seaspray L/C 16113

## Features

Quality homogenous inlaid construction.

Performance and beauty that lasts for years.

Revolutionary patent pending wear layer that stops dirt being ground into the surface.

(US patents 5891654 & 5670237)

Excellent stain/soil resistance.

18 co-ordinated colours including low contrast for special requirements.

Fire and slip rated to Australian standards for class 9a buildings.

No abrasive particles for easy cleaning.

## Low Contrast Colours

These colours have been designed exclusively for healthcare rooms. They provide a soothing work environment for long hours in surgery as well as a backdrop for easy identification of foreign material.


The slip retardant surface provides safety in wet and dry conditions and is the easiest to clean slip retardant flooring in the industry.

**Please register your project with a Spectrum Representative to ensure material availability.**


Assurance's performance and beauty lasts for years because of its excellent stain and soil resistance.



Sandrift 16004

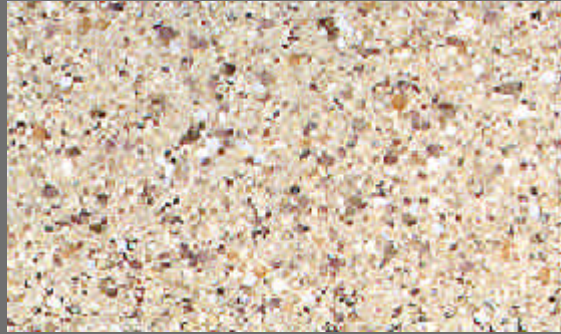

Cool Beige 16008

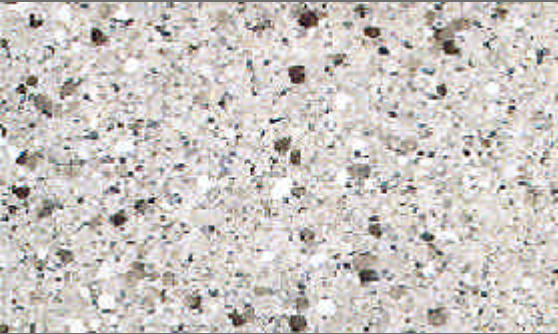


Glacier 16001




Stone Gray 16002



Shale 16003

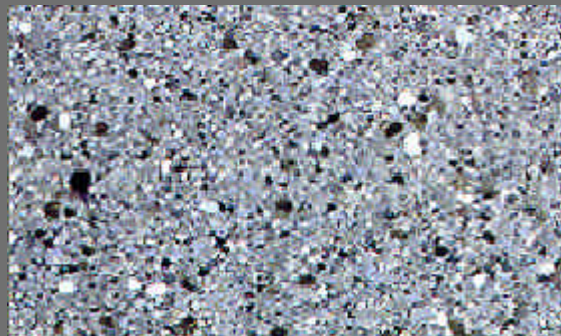


Larkspur 16011

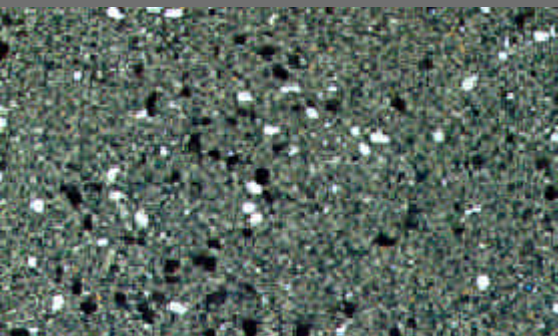


Baltic Green 16015



Spruce 16018

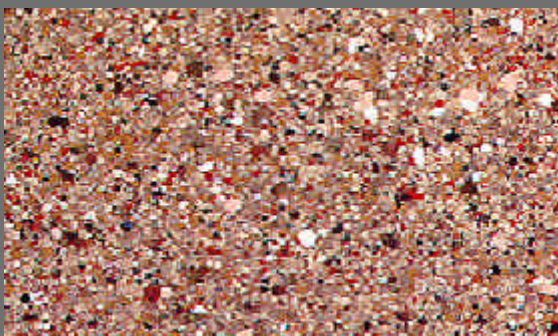

Redwood 16010

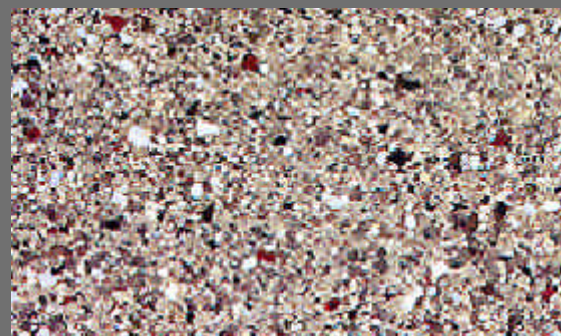

Taupe 16009



## Installation

Installation is an important part of a successful floor.

All product should be installed in accordance with AS1884-1985 using good trade practice.

Detailed laying instructions and adhesive recommendations available on request.

Colour co-ordinated heat weld rods are available in 501/m reels.

## Maintenance

Assurance is not to be sealed or polished.

Spray buffing is not recommended or required.

Antiseptic or disinfectant solutions may be applied to sanitise where necessary.

Note: Lack of or improper maintenance may cause significant variation in actual performance.

Spectrum Floors or your representative are at your service for literature, samples and information.

## Product Data

Overall thickness (nominal)	2.03mm
Wear layer (nominal)	2.03mm
Weight	3.1kg/m <sup>2</sup>
Width	183cm
Wear rating	Commercial Extra Heavy Duty
Fire rating (AS 1530.3)	16 - 0 - 1 - 6
Slip resistance (AS 4586)	XF

## Specification Guide

Supply and install to all floors shown in the finishes schedule or listed in this specification 'Assurance' by Spectrum, premium quality slip retardant homogenous vinyl flooring having an inlaid (patent pending) wear layer of 2.03mm incorporating an easy clean surface.

Install in accordance with AS 1884-1985 and the suppliers written recommendations including adhesive to suit the site conditions.

All joints shall be set out to an acceptable layout and heat welded with matching weld rod.