


# Details and Accessories integral to successful installation

## Recessed frames/installation

Nuway matwell frames are available in aluminium, and are designed to anchor into sand and cement screeds for secure site installation. All frames are custom built to fit specific site requirements, with curved shapes available to special order. Nuway frames are supplied in kit form for ease of transport, storage and on-site assembly.

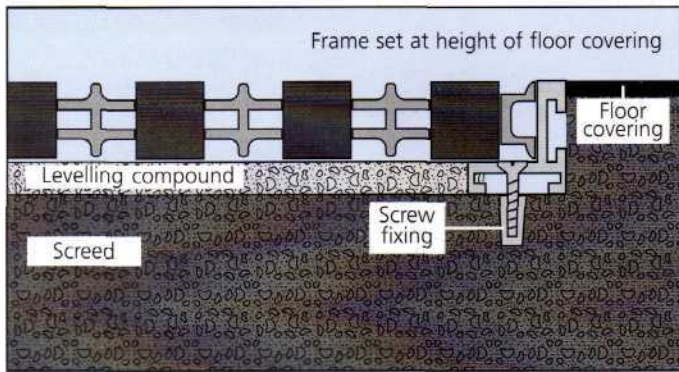


Cross section of matwell frame set into screed with screw fixing

## Cleaning, maintenance and aftercare


Nuway entrance flooring systems effectively stop dirt from entering a building. To maintain optimum performance, and for the warranty it is essential to regularly remove soiling to prevent the product from becoming saturated and lose its ability to perform. Detailed instructions are available on request.

## Nuframe dimensional drawing

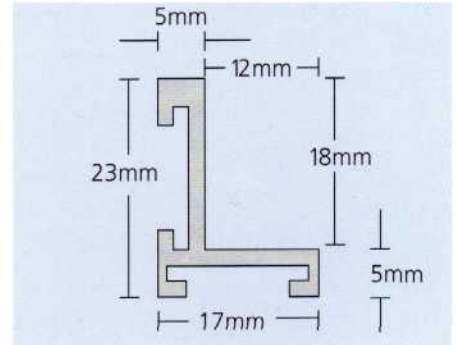

## Ramped frames / Surface mounted installations


Internal and external ramp frames are supplied mitred. The surface is ribbed for enhanced grip.

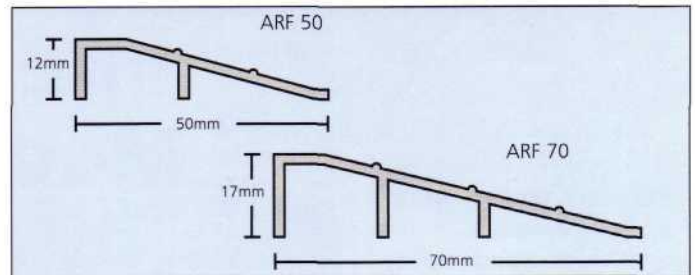

## Nuway T-Bars

Nuway T-Bars can be used to provide a surface mounted matwell frame, mitred and screwed to the existing floor surface where the adjoining floor covering is of sufficient thickness.

Nuway T-Bars also provide separation between modules to facilitate easy removal for cleaning, reversibility and as rib alignment is not possible in many installations.



Available in aluminium, brass or PVC. T-bars are automatically included in each order as required.

